



# 300 Series Ultra Fast Fill Quick Coupler - SAE

## Applications

Fast Flow Filling Systems, Storage Cascade to Trailer/Transporter, Trailer/Transporter connection to Daughter station and direct feed to CNG Dispensers. Suitable for CNG, Hydrogen, RNG, Bio Gas, Nitrogen and Air.



1" Ultra Fast Fill Quick Couplers - SAE thread options

## Materials

Item	Description	Material
1	HC Body (Female or Male)	316 Stainless Steel
2	HC Male End Cap	316 Stainless Steel
3	O-rings (Body, SAE, Poppet)	Nitrile
4	Back-up rings	Nitrile
5	Sleeve (Body, Retainer)	316 Stainless Steel
6	Sleeve Spring	304 Stainless Steel

Item	Description	Material
7	Segments	420 Stainless Steel
8	Poppet (Stem, Retainer, Guide)	316 Stainless Steel
9	Poppet Seal	Delrin
10	Poppet Spring	304 Stainless Steel
11	Dust Cap	Nylon

## Product Information

Female and male are sold individually.

SAE male thread to SAE J1926-2 Heavy Duty standard.  
SAE Female Port to SAE J1926-1 Standard. Female port available for female coupler only.

All products are manufactured to ISO 9001 standard.

Compatible with profile B of ISO7241 and is connectable with Oasis HC208 couplers.

Complies to PED 2014/68/EU.

Designed to be uncoupled/coupled at atmospheric pressure (Ops gauge) only, making accidental disconnection very difficult and improving the safety of the device.

The use of hose restraints is recommended while using the HC308 couplers, contact Oasis Engineering for more info.

SAE Male Thread couplers include recommended dust cap.

More information available online at [www.oasisngv.com](http://www.oasisngv.com)

## Features & Benefits

Male SAE thread allows for direct connection to trailer manifolds without the need for fittings or adapters. This reduces the number of potential leak points in the system.

Female SAE Port on female coupler allows for easy connection to SAE Male hoses.

Anti-leak spring loaded poppets instantly stops gas flow when disconnected, greatly increasing safety and reducing the amount of debris entering the system.

All stainless steel construction gives corrosion and wear resistance.

Hardened segment connection style increases gripping surface area. This significantly reduces wear on male couplings.


Integrated lock-in-place sleeve to ensure correct coupling is achieved.

A green ring is visible on female only when the device is correctly coupled, improving the visual confirmation that it is correctly joined to a male before pressurizing.

Service kits are readily available & easy to install.



## 300 Series Ultra Fast Fill Quick Coupler - SAE

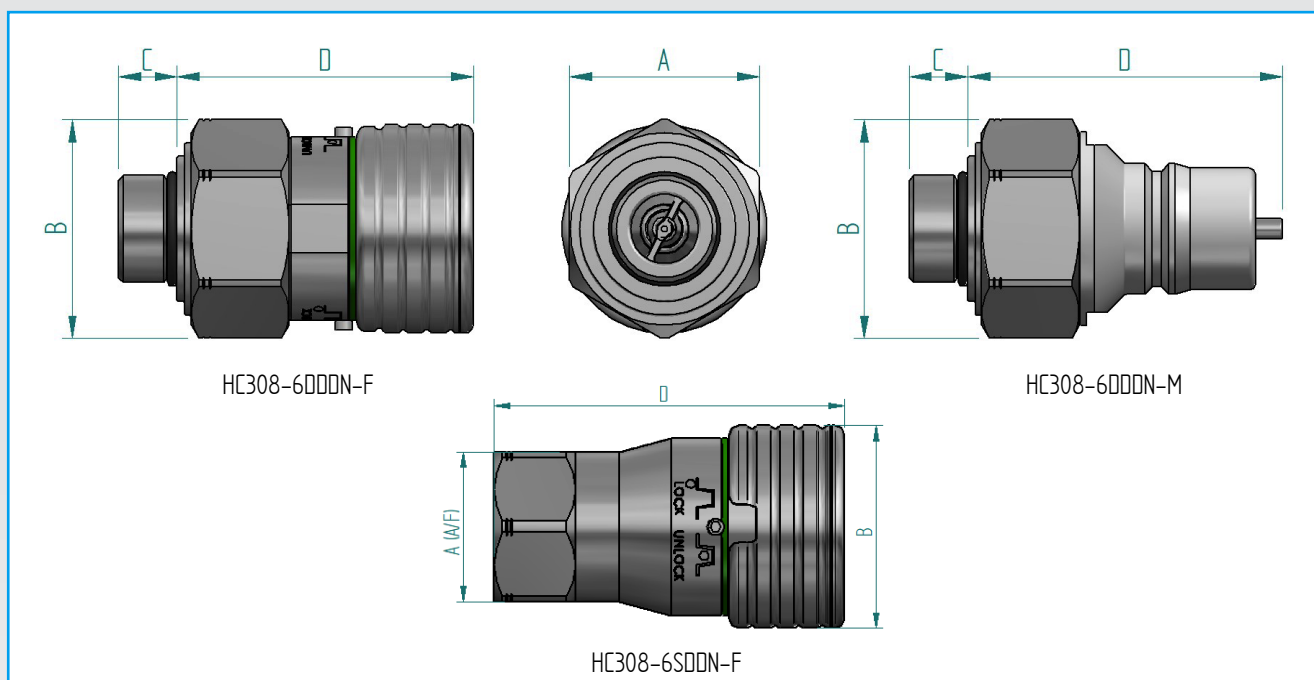

### Dimensions: Imperial (mm)

Part Code	Nominal Size	A (A/F)	B	C	D	Threads
HC308-6DDDN-F*	1"	2.36" (60)	2.68" (68)	0.73" (18.5)	3.68" (93.7)	1 5/16"-12 SAE Male
HC308-6DDDN-M*	1"	2.36" (60)	2.68" (68)	0.73" (18.5)	3.92" (99.6)	1 5/16"-12 SAE Male
HC308-6SDDN-F	1"	1.89" (48)	2.55" (64.8)	-	4.4" (111.8)	1 5/16"-12 SAE Female

\*Dust Cap Included.

### Product Specification

Part Code	Mass lb (kg)	Min. Operating Pressure bar (psi) *	Max. Operating Pressure bar (psi) **	Min. Temp. °F (°C)	Max. Temp. °F (°C)	Cycles Before Rekit^	Cv^^	Service Kit
HC308-6DDDN-F	3.6 (1.6)	6.9 (100)	345 (5000)	-40 (-40)	185 (85)	20,000	17.1	HC308-SKDDDN-F
HC308-6DDDN-M	2.7 (1.2)	6.9 (100)	345 (5000)	-40 (-40)	185 (85)	20,000	17.1	HC308-SKDDDN-M
HC308-6SDDN-F	3 (1.4)	6.9 (100)	345 (5000)	-40 (-40)	185 (85)	20,000	17.1	HC308-SKSDDN-F

\* Minimum system pressure the product will hold constant bubble tight seal.

\*\* Maximum pressure at which the product can continuously operate at.

^ It is recommended that the coupler is re-kitted on or before the maximum number of allowable cycles.

^^ CV measured when coupled to corresponding Oasis coupler.



## 300 Series Ultra Fast Fill Quick Coupler - SAE

### HC308 Female - SAE Male - Dust Cap (HC308-SDC-F)

The Oasis Dust Cap has been designed to protect the HC308 Female - SAE Male Thread Coupler from damage, dust and debris. Oasis recommends the use of the dust cap to maintain the life of the product. Dummy male also available for female port variant.

#### Product Information

HC308-SDC-F - 1" Ultra Fast Fill Quick Coupler Female - SAE Male Thread Dust Cap :

- For use with HC308-6DDDN-F only.
- Included with all female couplers.

Used to keep dust and debris out of the couplers and the system.

Durable plastic design.

Available for purchase separately.



HC308-SDC-F - 1" Ultra Fast Fill Quick Coupler  
Female - SAE Male Thread Dust Cap

### HC308 Male - SAE Male - Dust Cap (HC308-SDC)

The Oasis Dust Cap has been designed to protect the HC308 Male - SAE Male Thread Coupler from damage, dust and debris. Oasis recommends the use of the dust cap to maintain the life of the product.

#### Product Information

HC308-SDC - 1" Ultra Fast Fill Quick Coupler Male - SAE Male Thread Dust Cap :

- For use with HC308-6DDDN-M only.
- Included with all male couplers.

Used to keep dust and debris out of the couplers and the system.

Durable plastic design.

Available for purchase separately.



HC308-SDC - 1" Ultra Fast Fill Quick Coupler  
Male - SAE Male Thread Dust Cap



## 300 Series Ultra Fast Fill Quick Coupler - SAE

### HC308 Dummy Male

Dummy male fitting to hold HC308 Female Coupler off the ground when not in use. Oasis recommends the use of this product to avoid damage to the female coupler.

#### Product Information

Made from durable plastic.

Fits into female coupler like a standard male coupler.

Designed to be bolted in place using a 1/4" (6mm) cap screw.

Sold separately.



SHC308-18 - Dummy Male



SHC308-28 - Pull Plug Dummy Male

### HC308 Ice Cover

The Oasis Ice Cover prevents ice build up on the HC308 Coupler while in use in cold climates or high flow applications.



HC308-COVER - 1" Quick Coupler Ice Cover



HC308-COVER in use

#### Product Information

Designed for exclusive use with all Oasis HC308 couplers.

Used to prevent ice build-up, which can make the HC308 hard to uncouple.

High strength, durable plastic body with neoprene insulation, designed to operate in low temperatures.

Corrosion resistant Stainless Steel cap screws.

For replacement options contact Oasis.